




## PARALLEL STRAND ROPE – GAMA 98®

Material : NYLON


Construction: The GAMA 98® ropes are made from high efficiency sub-rope cores laid parallel within an outer braided jacket. Each sub-rope is computer monitored during manufacture to ensure all sub-ropes have equal tension and length. The GAMA 98® has become the industry standard for FPSO/FSO offtake mooring hawser arrangements.

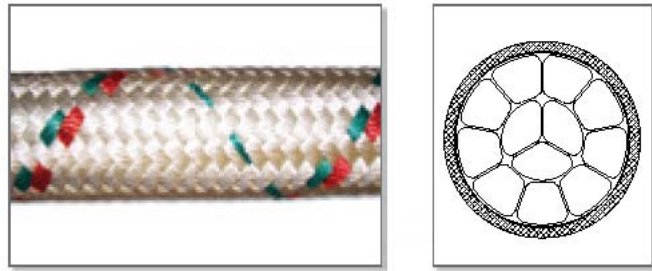

Rope in which components are laid parallel to each other within an outer braided jacket (also circular braided).  
 The jacket is non-load bearing

Manufactured and supplied in accordance with the **OCIMF 2000** "Guidelines for the Purchasing & Testing of SPM Hawsers"

Dia mm	Size Inch	NDBS kN	NDBS Tonne	Weight Kg/100m
80	10	1851	188	400
88	11	2172	221	480
96	12	2574	262	570
104	13	3010	307	670
112	14	3480	355	760
120	15	3982	406	900
128	16	4518	461	1020
136	17	5086	518	1150
144	18	5688	580	1270
152	19	6322	645	1430
160	20	6989	712	1560
168	21	7688	783	1720

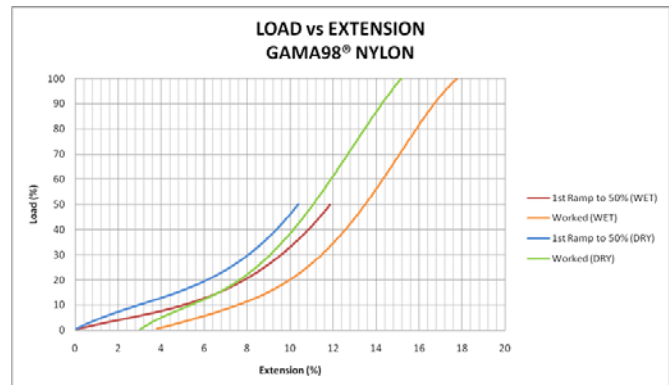

Δ Other sizes are available on request

Δ These data are for guidance purposes only and are subject to change without prior notice



**Offspring International Ltd**

Unit 8, Castle Court 2, Castlegate Way, Dudley, West Midlands, DY1 4RH. UK

Tel: +44 1384 453880 / Fax: +44 1384 453888

Email: [mail@offspringinternational.com](mailto:mail@offspringinternational.com) / Web: [www.offspringinternational.com](http://www.offspringinternational.com)

**World-wide Sales Agents  
 for Deep Water Mooring  
 and Single Point Mooring**